

Temperature Sensors

TS Series Options

- Temperature via thermistor 3 kohm @ 77 °F (25 °C)
- Duct Insertion
- Immersion with Well
- Duct Averaging
- Strap-on
- Outside Air Temperature
- Flying leads for easy wiring

Product Specifications

Output: 3,000 Ohms @ 77 °F (25 °C)

Temperature Range:

-40 to 100 °C

-40 to 212 °F

Interchangeability:

0.2 degrees C (0 to 70 °C)

Highly Stable, No Field Calibration Required

Dissipation Constant:


3 mW per degree Celsius

Connections: flying leads.

The TS Series temperature sensors are thermistor type sensors. They may be used with the ASIC/1-8x55, and ASIC/3 products that include conversion tables for these. These sensors are a perfect complement to the WS-R and WS-0xx series. The TS Series temperature sensors are offered with options including: Duct Insertion, Immersion, Averaging, Strap-on, and Outside Air Temperature.


- TS-D-x Duct Insertion temperature sensors with J-box where x is the length 4", 8", 12", or 18". Sensor is mounted through hole in duct and attached with mounting bracket.
- TS-I-x Immersion temperature sensors (including 304 series stainless steel thermowell 1/2" NPT thread) where x is the length 4" or 8".
- TS-A-x Averaging temperature sensors where x is the length 8 ft, 12 ft, or 24ft. The sensor is inserted through hole in duct, and then strung in a fashion that covers the greatest surface area.
- TS-S Strap-on temperature sensors includes junction box.

 Mounted on bottom side of pipe with 2"-5" pipe clamp.
- TS-O Outside Air Temperature sensor in weatherproof enclosure with mounting hardware. Mount downward and out of direct sunlight.
- TS-BBS Ceiling-mounted; button shape with brass finish

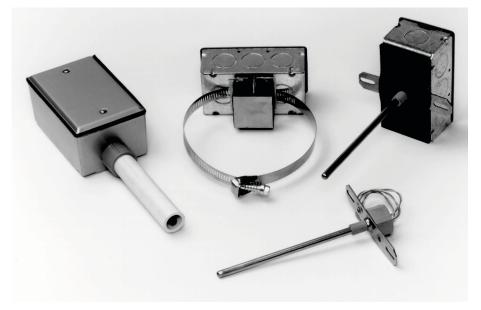


Temperature Sensors


Dimensions

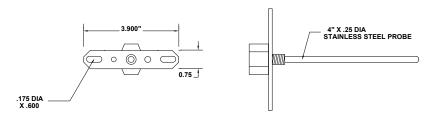


TS-I-04, -08 IMMERSION WELL




Immersion sensor well.

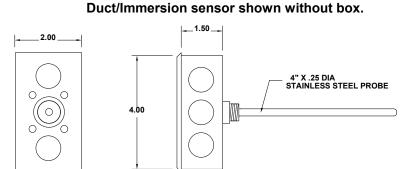

Duct/Immersion sensor shown with box.



TS-S, Strap-on sensor.



TS-O, Outside Air Sensor.

| How to Order: | Order Number |
|-----------------------------------|--------------|
| Duct Insertion Temperature Sensor | |
| Length 4 inches | TS-D-04 |
| Length 8 inches | TS-D-08 |
| Length 12 inches | TS-D-12 |
| Length 18 inches | TS-D-18 |
| ImmersionTemperature Sensor | |
| Length 4 inches | TS-I-04 |
| Length 8 inches | TS-I-08 |
| AveragingTemperature Sensor | |
| Length 8 ft | TS-A-08 |
| Length 12 ft | TS-A-12 |
| Length 24 ft | TS-A-24 |
| Strap-On Temperature Sensor | TS-S |
| Outside Air Temperature | TS-O |



Made in USA